

Starting Procedure

TT250

When you receive your motorcycle, the fuel valve will be in the **OFF** position.


You will need to turn the fuel valve to the **ON** position



The Choke Lever is located on the left handlebar. There are 3 positions for the choke.

1. If the motorcycle does not initially start with full choke after 3 seconds, adjust to 1/2 choke and partial throttle 2. If the motorcycle does not start after multiple attempts, it may be flooded. Turn choke off. Hold throttle wide open, and start 3-5 seconds. wait for 2 minutes. retry with no choke and partial throttle.

3. In warm weather, above 80 degrees, only 1/2 choke is needed. if engine is warm, no choke needed. 4. Do not use starter longer than 5 seconds. do not have choke on while riding.

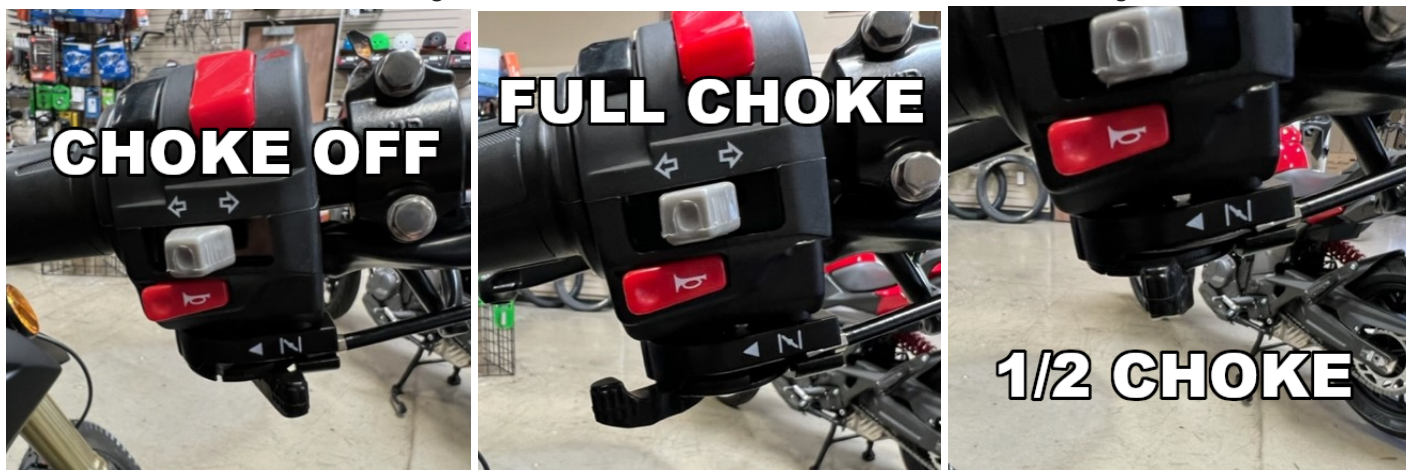

Make sure the run/stop switch in the right handlebar is in the RUN position.

Place the key in the ignition and turn to the ON position. Your bike is ready to start. Locate the start button on the lower right hand control and press it until the bike starts. Once running use the throttle to keep the engine running and move the choke lever to the OFF (down) position



Let the bike warm up for a couple minutes and you are ready to ride.